true RESIDENTIAL®

TURADA-24-D-A~O

FEATURES

- 32" height allows for installation under ADA-compliant counter top
- Sleek black aluminum interior – stainless steel drawer bin inserts
- Black powder coated steel exterior
- Forced air refrigeration system which maintains 33°– 41°F (0.5°– 5°C)
- Environmentally friendly R600a refrigerant
- Concealed digital temperature controls allows for precise temperature management
- White LED lighting illuminates your product
- UL-rated for outdoor use
- Unit comes standard with 4 adjustable leg levelers
- Lock optional
- NSF/ANSI Standard 7 compliant for packaged food product

BUILD YOUR TRUE

Customize your True with a variety of finish and hardware options at **true-residential.com**.

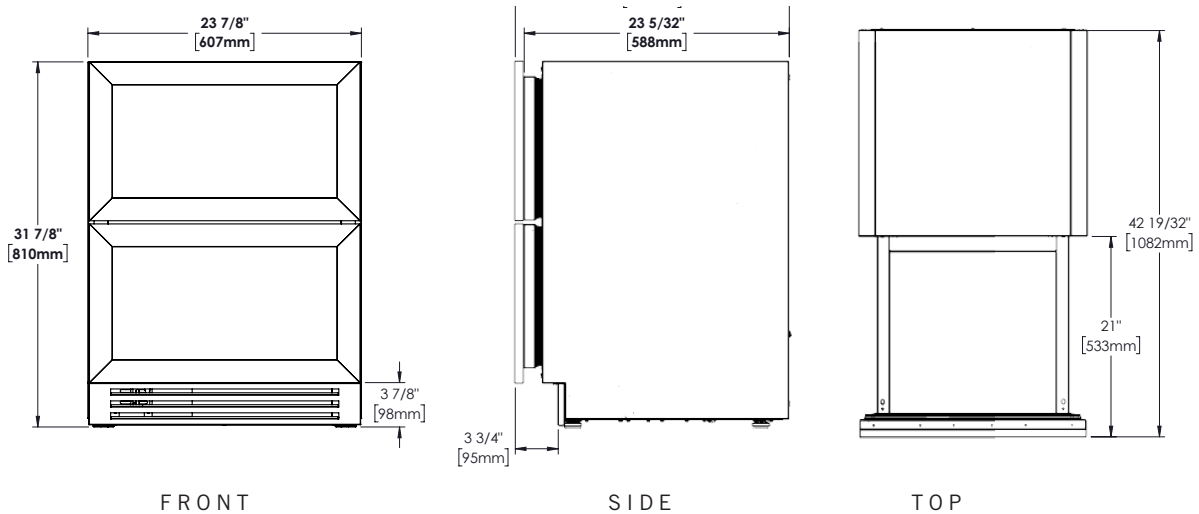### CUSTOMIZATION

SPECIFICATIONS

Dimensions* (w x h x d)	23 ⅞" x 31 ⅞" x 23 ⁵⁄₃₂"
Cutout Dimensions (w x h x d)	24" x 32" x 24"
Standard Overlay Panel (w x h x d)	23 ⅝" x 28" x ¾"
Panel provided by others. Other installation options available. Consult install guide for details.	
Capacity (cu. ft.)	5.0
Temperature Range	33°- 41°F (0.5°- 5°C)
Weight (lbs.)	190
Voltage	115/60/1 115/60/1 NEMA-5-15R
Amps	0.8
Annual Energy Consumption (kWh)	273
Power Cord Length (ft.)	10
Energy Star Rated	Yes

*Dimensions may vary +/- ⅛"

Specifications subject to change without notice.

TURADA-24-D-A~O — (shown with a ¾"cabinetry panel.)

23 7/8"
[607mm]

31 7/8"
[810mm]

3 7/8"
[98mm]

FRONT

23 5/32"
[588mm]

3 3/4"
[95mm]

SIDE

42 19/32"
[1082mm]

21"
[533mm]

TOP

OPENING DIMENSIONS

ROUGH OPENING
WIDTH
24" min

ROUGH OPENING
HEIGHT
32" min

ROUGH OPENING
DEPTH
24" min

MODEL OPTIONS

MODEL	FINISH
TURADA-24-D-A~O	Overlay panel ready drawer model

Stainless steel version also available

ACCESSORIES (OPTIONAL)

2½" legs

6" toe kick

WARRANTY

• 2 year full – parts & labor

• 5 year sealed system – parts & labor

2001 East Terra Lane | O'Fallon, MO 63366-4434 | p 636.240.2400 | f 636.272.7546 | true-residential.com | info@true-residential.com

BP_234522_10.24

Specifications subject to change without notice.